


Tiger Adaptor Hoists

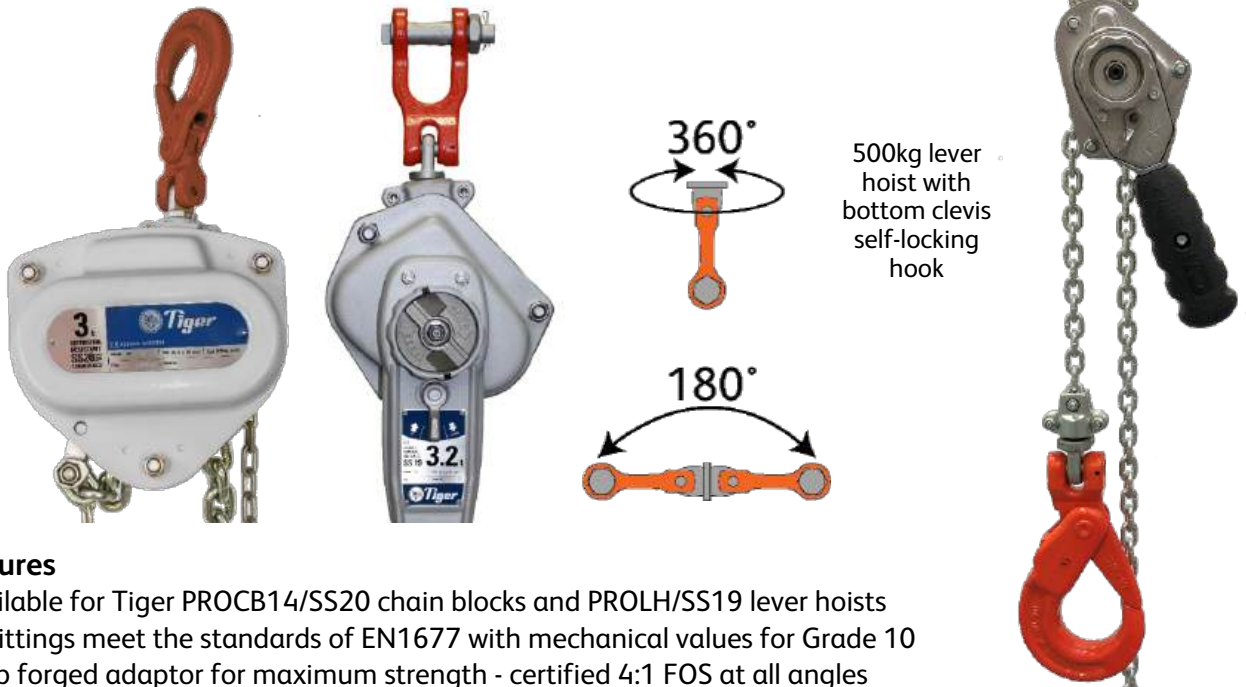


Main Features

- Available for Tiger PROCB14/SS20 chain blocks and PROLH/SS19 lever hoists
- All fittings meet the standards of EN1677 with mechanical values for Grade 10
- Drop forged adaptor for maximum strength - certified 4:1 FOS at all angles
- Clevis shackle, Self-locking (safety) hook, reeveable egg (master) link or sling hook fitting available
- Overload protection available
- For lifting at angles (cross hauling/fleeting/driftng) with no deration
- Chain Blocks – 500kg – 10t capacity
- Lever Hoists – 500kg – 10t capacity

Tiger Adaptor Hoists are available with our drop-forged clevis adaptor allowing for the interchangeable range of EN1677 Tiger grade 100 at 400°C tempered clevis fittings. These fitting are available for Tiger PROCB14 and SS20 chain blocks and PROLH and SS19 lever hoists.



This Tiger manufactured knuckle configuration gives **360° Rotation and 180° Pivot** for maximum flexibility, whilst maintaining our 4:1 factor of safety at all angles.

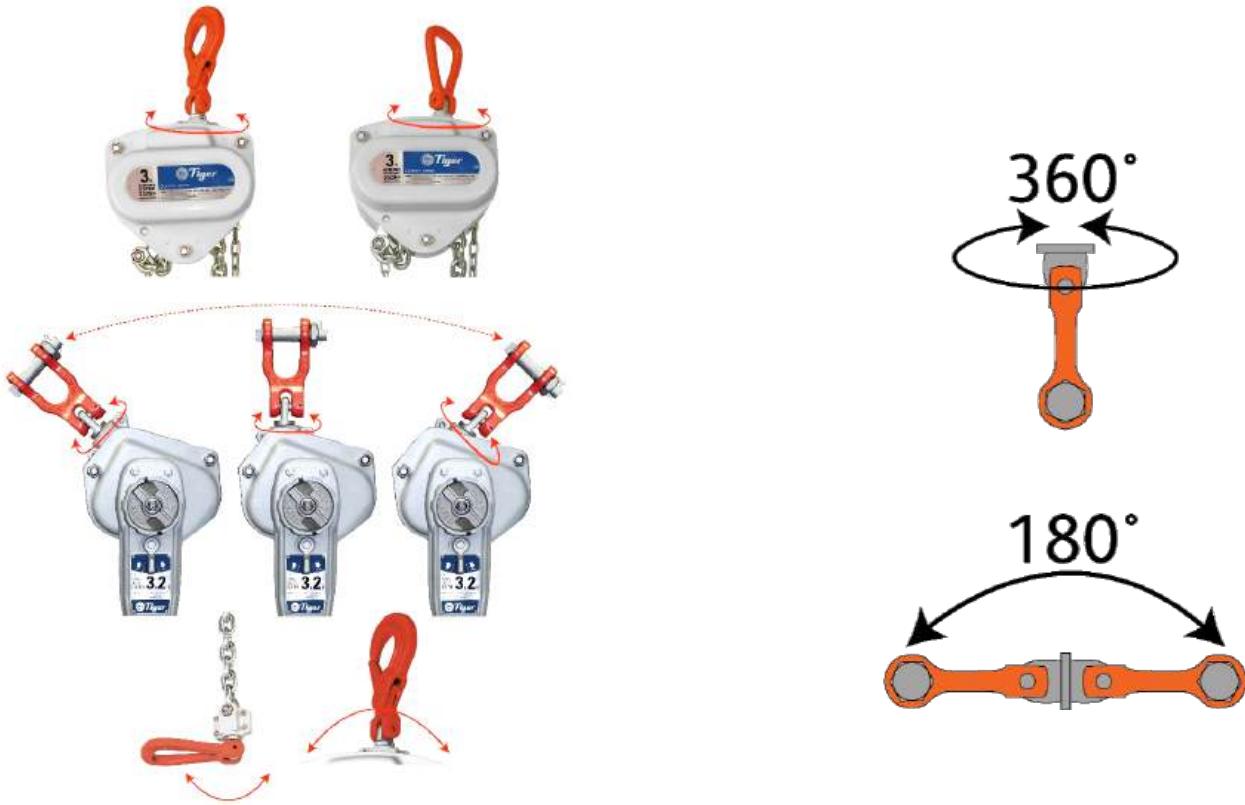

Please see Tiger PROCB14, SS20, PROLH and SS19 data sheets for more technical information and dimensions on the hoist bodies and chain.



Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.